alfanar Switch Boxes





www.alfanar.com



DURABILITY

Contents

Intr	Introduction		
Pro	duct Application	. 4	
alfe	anar Switch Boxes Features:	. 5	
	1- Design	. 5	
	2- Safety	. 5	
	3- Reliability	. 5	
	a. High corrosion resistant		
	b. Mechanical strength		
4-	Installation	. 6	
	a. Knockouts		
	b. Adjustable lug		
	c. Switch boxes with coupler		
	d. Cement guard		
5-	Environment	. 7	
6-	Type Testing	.7	
	a. Design and manufacturing		
	b. Routine tests		
	c. Certificates		
Tec	hnical Specifications	. 8	
Ava	ilable Varieties and Ordering Details	. 9	
Not	Notes		
-			



Introduction

alfanar has a long history of manufacturing safe and reliable electrical products. We use the highest quality materials for our switch boxes to provide the mechanical strength and durability required throughout their service life.

The registered design of **alfanar**'s switch boxes simplifies electrical wiring connections and accessory installations.

Their versatility and high-performance reliability make them ideal for residential and commercial building installation.

To ensure end user safety and confidence, our switch boxes comply with national and international standards, and are type tested as per BS4662.



Application

alfanar switch boxes are widely used for the installation of wiring and accessories in residential, commercial and industrial buildings. Their easy installation features simplify connections and increase installation productivity while providing safe and reliable electrical performance.

Product Features

1. Design

Registered Design




Registered in KACST

(King Abdulaziz City for Science and Technology, the Saudi Arabia industrial design certifying authority to prevent design infringement).

2. Safety

Protection against electric shock

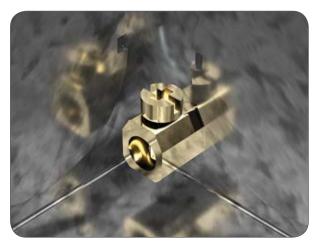

Effective earth continuity is ensured in our switch boxes, for varieties that include brass or steel terminals, to protect operators against any possible electrical shock.

Earth terminals are pivoted to ensure tightness and earth continuity.

3. Reliability

a. High corrosion resistant enclosure and internal parts



To protect against corrosion, our switch boxes are fabricated using high quality hot-dipped Galvanized steel sheet material.

This process has been validated for 336(Ri2) hours using the Salt Spray test.

This ensures the functionality of the switch boxes under the harshest atmospheric corrosive conditions.

b. Mechanical strength



Switch boxes are designed and manufactured to ensure adequate mechanical strength during installation and durability throughout their service life.

Furthermore, the lugs are threaded into the switch boxes which increases their reliability and resistance to damage even after multiple use.



Product Features


4. Installation

a. Knockouts



Knockouts are designed to handle multiple sized conduits and glands of international standards. They can be easily removed with little effort even after the switch boxes have been installed on walls. **alfanar** switch boxes have smooth edges that won't damage the conduits and wires or injure the user.

b. Adjustable lug

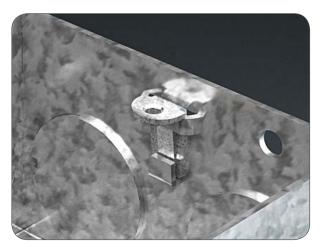

alfanar switch boxes include adjustable lugs which are useful in aligning accessories and their overall placement on walls, giving your accessories a neater, balanced look.

c. Switch boxes with coupler(s)

Switch boxes with coupler(s) are used for perfect alignment and to maintain a uniform gap between wiring accessories to give them an elegant look.



1. Two-module: Two switch boxes (7x7x3.5) connected by special **alfanar** coupler



2. Three-module: Three switch boxes (7x7x3.5) connected by special **alfanar** couplers



3. Four-module: Four switch boxes (7x7x3.5) connected by special alfanar couplers

d. Cement guard

Cement guards are included in **alfanar** switch boxes to protect the product from cement deposit during installation.

The cement guards also keep the switch boxes clean for the installation of the wires and accessories.

Cement guards save time and installation effort compared to previous methods.



Product Features

5. Environment

All components used in alfanar switch boxes are Environmentally friendly and RoHS compliant.



6. Type Testing

a. Design and manufacturing

Extensive care is taken during the designing and manufacturing stages of switch boxes to ensure the safety of the end user. **alfanar** switch boxes are type tested as per British Standard and marked with BS 4662.

b. Routine tests

Each of our products undergo strict quality control checks as per the routine verification tests mentioned in the standard.

c. Certificates



TEST	T CERTIFICATE
leaved to:	Atlanar Electrical Systems Madmet atlanar 3rg Industral Chy. P. O. Box 564. Rejustr: 1133 Saud Anabia
Subject	Type testing
For the product	Box for flush mounting of electrical accessories
Trade name:	News/H
Type/Model:	the bex is provided with fixed kg having steel earth terminal
Szes: (n mm)	(%)(350) (%)
Manufacturer' Production sites	Marar Bectical Systems Macher allivar Joi Induned Car, P.O. Bos Kik, Ryadi: 11323 Saud Arabis
	Altrain Rectical Systems L1.C Dual Investment Pak 1 P.0. Box 32275; Duted Arab Emission United Arab Emission
Requirements	85 4562,2005 + A1 2009
Remarks:	The products comply with the above mentioned requirements
This Test Certificat in a confidential file	In a granted on account of an examination by CRXSA, the secults of which are laid down into 2217061 50.
manufacturar. The	as been carried out on one set of three operaneous of the product, submitted by the Attestation does not include an assessment of the manufacture's production. Production with the spectment tested by DEKRA is not the responsibility of DEKRA.
Ambern, 24 July 2	107 Number 2317001.04
DEXRA Certificatio	w8V.
drs. G.J. Zovetreco Managing Director	F.S. Stellewets Certification Manager
	The estimate and adjusting records a showed
	V Nander 197: 4825 M; Anhee P O, Do 1985 4902 ED Annen, The Vehiclen 9 MAR 2019, www.ankio.comfluxion.com Company registration/0906288



Technical Specifications

Technical Data		
Standard	BS 4662	
	Electrical	
Voltage range	120-440V AC	
Frequency	50/60 Hz	
	Construction Features	
Material	Hot-Dipped Galvanized Steel Sheet (Corrosion Resistant)	
Steel thickness	0.9mm / 1.1mm	
Knockout sizes	ø 20.5 / ø 26.5	
	1. With Brass Earth Terminal	
	2. With Steel Earth Terminal	
	3. With Adjustable Lug(s)	
Features / Varieties:	4. With Brass Earth Terminal & Adjustable Lug(s)	
	5. With Coupler(s)	
	6. Without Earth Terminal	
	7. With Provision for Earth	
	1. 72(h) x 72(w) x 35(d)mm	
Dimensions	2. 72(h) x 72(w) x 47(d)mm	
Dimensions	3. 72(h) x 132(w) x 35(d)mm	
	4. 72(h) x 132(w) x 47(d)mm	



Available Varieties and Ordering Details

Switch box W: 72 mm, L: 72 mm, D: 35 mm

Legend:			
Brass Earth			
Steel Earth			
Cement Guard			
Adjustable Lug			
Plastic coupler between boxes			
Provision for Earth terminal			



No.	Item code	Steel Thickness	Accessory	Knockout details
1	22-020707MG	0.9 mm	SE, CG	7X20.5 + 4X26.5 mm
2	30-010707EXG	0.9 mm	CG	5X20.5 + 6X26.5 mm
3	30-010707G	0.9 mm	CG	5X20.5 + 6X26.5 mm
4	30-020707D	0.9 mm	SE, CG	5X20.5 + 6X26.5 mm
5	30-020707G	0.9 mm	SE, CG	5X20.5 + 6X26.5 mm
6	30-020707MG	0.9 mm	SE, CG	7X20.5 + 4X26.5 mm
7	30-030707G	0.9 mm	BE, CG	5X20.5 + 6X26.5 mm
8	30-030707MG	0.9 mm	BE, CG	7X20.5 + 4X26.5 mm
9	30-060707G	0.9 mm	BE, ADL, CG	5X20.5 + 6X26.5 mm
10	30-150707G	0.9 mm	PE, ADL	5X20.5 + 6X26.5 mm
11	30-P10707G	0.9 mm	PE, CG	5X20.5 + 6X26.5 mm
12	30-P10707I	0.9 mm	PE	5X20.5 + 6X26.5 mm
13	30-P10707MG	0.9 mm	PE, CG	7X20.5 + 4X26.5 mm
14	30-PS10707G	0.9 mm	PE, CG	11X20.5 mm
15	30-PS10707I	0.9 mm	PE	3X20.5 + 8X26.5 mm
16	30-070707G	1.1 mm	CG	5X20.5 + 6X26.5 mm
17	30-090707G	1.1 mm	BE, CG	5X20.5 + 6X26.5 mm
18	30-120707G	1.1 mm	BE, ADL, CG	6X20.5 + 5X26.5 mm
19	30-120707G2ADJ	1.1 mm	BE, 2 ADL, CG	5X20.5 + 6X26.5 mm
20	30-BS120707D	1.1 mm	BE, ADL, CG	5X20.5 + 6X26.5 mm




Available Varieties and Ordering Details

Switch box W: 132 mm, L: 72 mm, D: 35 mm

Legend:

BE:	Brass Earth
SE:	Steel Earth
CG:	Cement Guard
ADL:	Adjustable Lug
COUPLER	Plastic coupler between boxes
PE:	Provision for Earth terminal



No.	ltem code	Steel Thickness	Accessory	KO details
1	22-020714G	0.9 mm	SE, CG	11X20.5 + 3X26.5 mm
2	30-010714G	0.9 mm	CG	11X20.5 + 3X26.5 mm
3	30-020714G	0.9 mm	SE, CG	9X20.5 + 5X26.5 mm
4	30-030714G	0.9 mm	BE, CG	11X20.5 + 3X26.5 mm
5	30-060714G	0.9 mm	BE, ADL, CG	11X20.5 + 3X26.5 mm
6	30-150714G	0.9 mm	SE, ADL, CG	9X20.5 + 5X26.5 mm
7	30-P10714G	0.9 mm	PE, CG	11X20.5 + 3X26.5 mm
8	30-PS10714G	0.9 mm	PE, CG	14X20.5 mm
9	30-070714G	1.1 mm	CG	11X20.5 + 3X26.5 mm
10	30-090714G	1.1 mm	BE, CG	11X20.5 + 3X26.5 mm
11	30-120714G	1.1 mm	BE, ADL, CG	11X20.5 + 3X26.5 mm

Switch box W: 72 mm, L: 72 mm, D: 47 mm

Legend:

BE:	Brass Earth
SE:	Steel Earth
CG:	Cement Guard
ADL:	Adjustable Lug
COUPLER:	Plastic coupler between boxes
PE:	Provision for Earth terminal




No.	Item code	Steel Thickness	Accessory	KO details
1	30-200707G	0.9 mm	PE, CG	5X20.5 + 6X26.5 mm
2	30-230707G	0.9 mm	BE, CG	5X20.5 + 6X26.5 mm
3	30-260707G	0.9 mm	BE, ADL, CG	5X20.5 + 6X26.5 mm
4	30-260707G-WOJ	0.9 mm	BE, ADL, CG	6X20.5 + 5X26.5 mm
5	30-270707G	0.9 mm	ADL, CG	5X20.5 + 6X26.5 mm
6	30-330707G	1.1 mm	BE, CG	6X20.5 + 5X26.5 mm
7	30-360707G	1.1 mm	BE. ADL, CG	6X20.5 + 5X26.5 mm
8	30-360707G2ADJ	1.1 mm	BE, 2 ADL, CG	6X20.5 + 5X26.5 mm
9	30-360707SPLG	1.1 mm	BE, ADL, CG	2X20.5 + 9X26.5 mm

Switch box W: 132 mm, L: 72 mm, D: 47 mm

Legend:

BE:	Brass Earth
SE:	Steel Earth
CG:	Cement Guard
ADL:	Adjustable Lug
COUPLER	Plastic coupler between boxes
PE:	Provision for Earth terminal



No.	Item code		Accessory	KO details
1	30-200714G	0.9 mm	CG	7X20.5 + 7X26.5 mm
2	30-230714G	0.9 mm	BE, CG	7X20.5 + 7X26.5 mm
3	30-260714G	0.9 mm	BE, ADL, CG	7X20.5 + 7X26.5 mm
4	30-330714G	1.1 mm	BE, CG	7X20.5 + 7X26.5 mm
5	30-360714G	1.1 mm	BE, ADL, CG	7X20.5 + 7X26.5 mm
6	30-360714SPLG	1.1 mm	BE, ADL, CG	3X20.5 + 11X26.5 mm

Switch box with Coupler W: 72 mm, L: 72 mm, D: 35 mm

Legend:

<u> </u>	
BE:	Brass Earth
SE:	Steel Earth
CG:	Cement Guard
ADL:	Adjustable Lug
COUPLER:	Plastic coupler between boxes
PE:	Provision for Earth terminal



No.	Item code		Accessory	KO details
1	30-0107072CG	0.9 mm	Coupler, CG	5X20.5 + 6X26.5 mm
2	30-0107073CG	0.9 mm	Coupler, CG	5X20.5 + 6X26.5 mm
3	30-0107074CG	0.9 mm	Coupler, CG	5X20.5 + 6X26.5 mm

Switch box with Coupler W: 72 mm, L: 72 mm, D: 47 mm

Legend: BE: Brass Earth


SE:	Steel Earth
CG:	Cement Guard
ADL:	Adjustable Lug
COUPLER:	Plastic coupler between boxes
PE:	Provision for Earth terminal




No.	Item code		Accessory	KO details
1	30-2007072CG	0.9 mm	Coupler, CG	5X20.5 + 6X26.5 mm
2	30-2007073CG	0.9 mm	Coupler, CG	5X20.5 + 6X26.5 mm
3	30-2007074CG	0.9 mm	Coupler, CG	5X20.5 + 6X26.5 mm



Notes

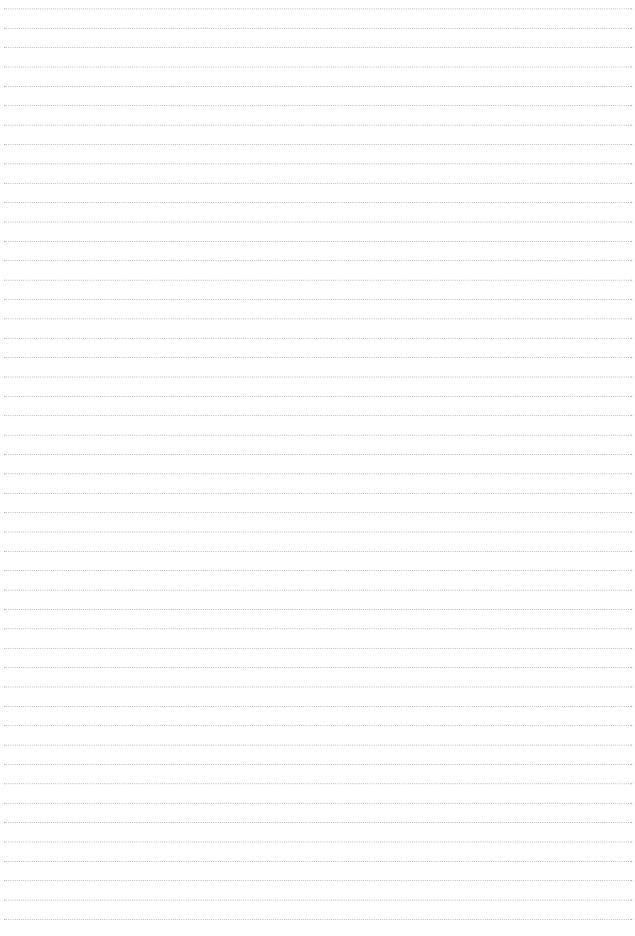


Notes

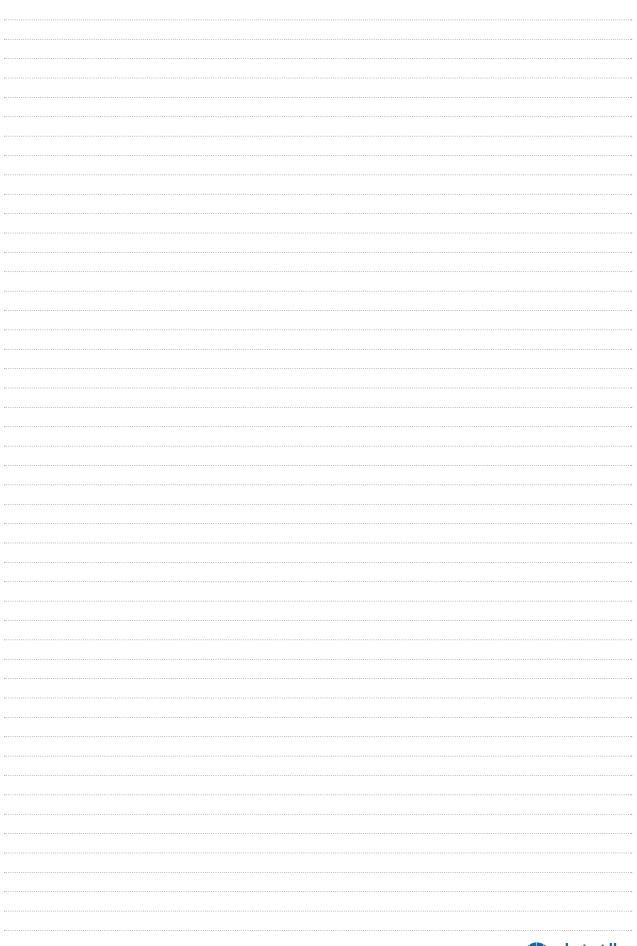



Notes

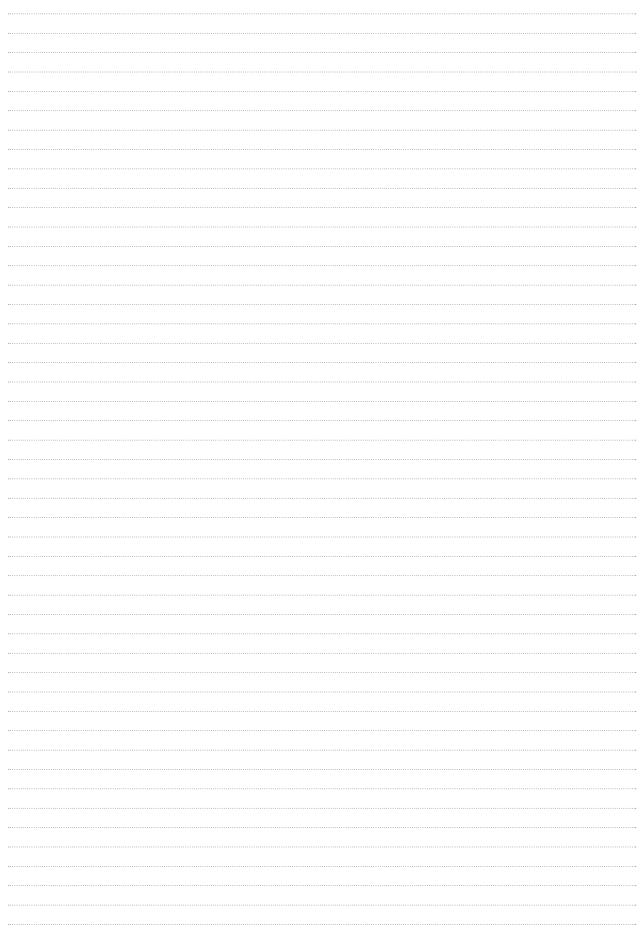



. .



108892_Feb.2019_V01